


SW2014



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release		SEE ECN# 013484	GRW	6/30/2016	KAC	6/30/2016


FEATURES AND BENEFITS:

- INDUSTRY STANDARD SIZE: LGX FOOTPRINT 5 3/32 [130] X 1 5/32 [29].
- SILKSCREENED PORTS NUMBERS ON BOTH SIDES.
- WIDE VARIETY OF ADAPTER QUANTITY & TYPE.
- MANUFACTURED WITH HIGH PERFORMANCE COMPONENT MATERIALS.
- LOW INSERTION LOSS.
- PRECISE ALIGNMENT FOR GLASS-TO-GLASS CONTACT.
- BLANK ADAPTER STRIP ALSO AVAILABLE TO COVER UNOCCUPIED CUT-OUTS.
- PUSH-PIN MECHANISM ALLOWS EASY AND QUICK TOOL-LESS INSTALLATION.


NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. INSERTION LOSS: 0.3dB MAX.
3. OPERATING & STORAGE TEMPERATURE -40°C TO +85°C
4. CERTIFICATIONS AND COMPLIANCES:


- ROHS
- GR-326-CORE
- TIA/EIA-568-C.3
- TIA-604-10
- TIA-455 SERIES
- UL 94
- IEC-61754-1
- ASTM A1008

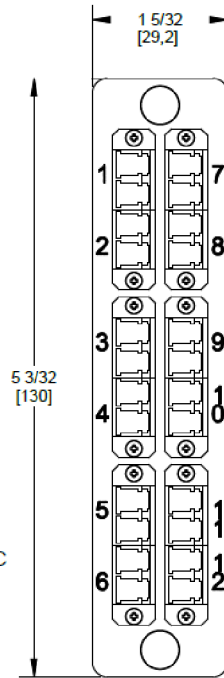


FRONT VIEW

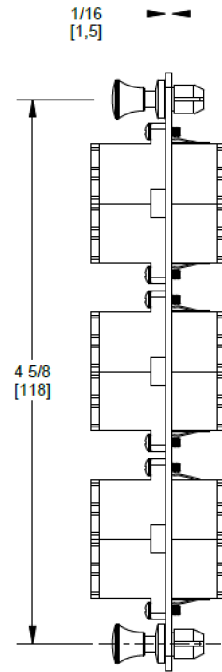

SIDE VIEW

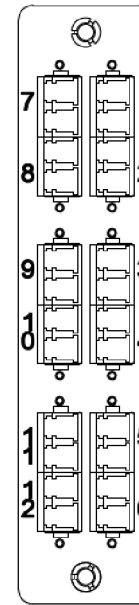

REAR VIEW

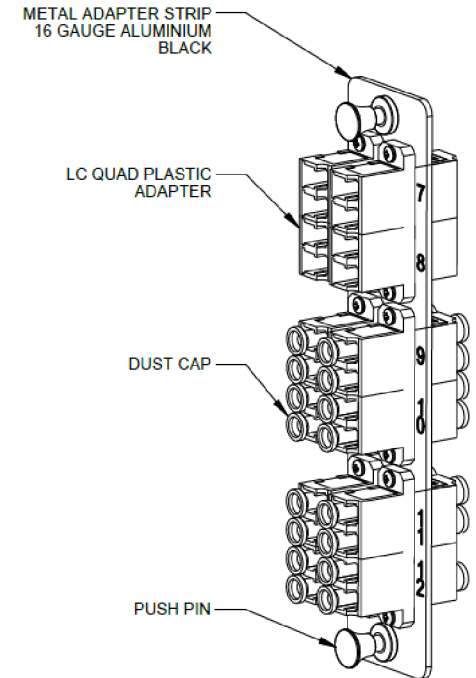

ISO VIEW

Type #	Mode	Color	Article #
VFAP6QMMLC	MULTI	BEIGE	904-00366
VFAP6QMMQLCZ	MULTI	AQUA	904-00367
VFAP6QSMLCZ	SINGLE	BLUE	904-00368

Material
ASSEMBLED

Units: **inches**
Dimension without tolerances details to:
.xxxx = ±.0005
.xxx = ±.005
.xx = ±.01
.x = ±.03
None = ±.06
∠ = ±0.5°
Dimension Formatted in/[mm]

The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.

Drawn GRW 6/29/2016
Approved KAC 6/29/2016
HellermannTyton
North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No VFAP6Q_
Title **FT ADAPTER PANEL WITH 6 QUAD LC CONNECTORS**
Drawing-No PRODUCTION : Phase
16-1268-001-CSU

Scale 1:1
Project Number PRP 16-1268
Format AH
Sheet 1/1