



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

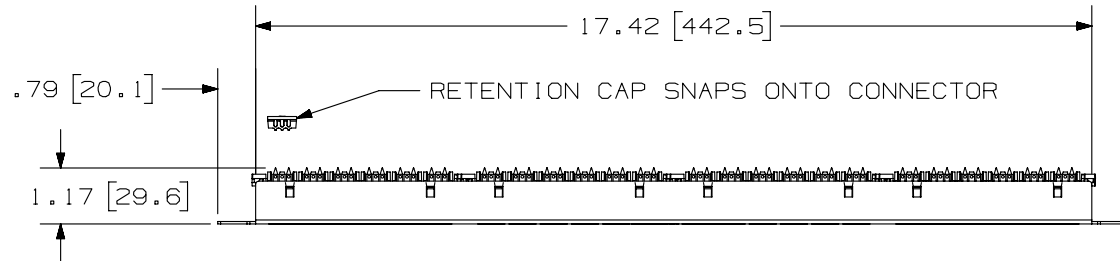

PANDUIT PART NO.	WEIGHT (APPROX.)
DP24688TGY	1.25 lb (567 g)

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
 PANEL HOUSING: STEEL
 RJ45 MODULE: THERMOPLASTIC RESIN UL94V-0
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
 RETENTION CAP:
 THERMOPLASTIC RESIN UL94V-0
- 24 PORT PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) METRIC M6x1x15MM SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN [] ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCH DOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

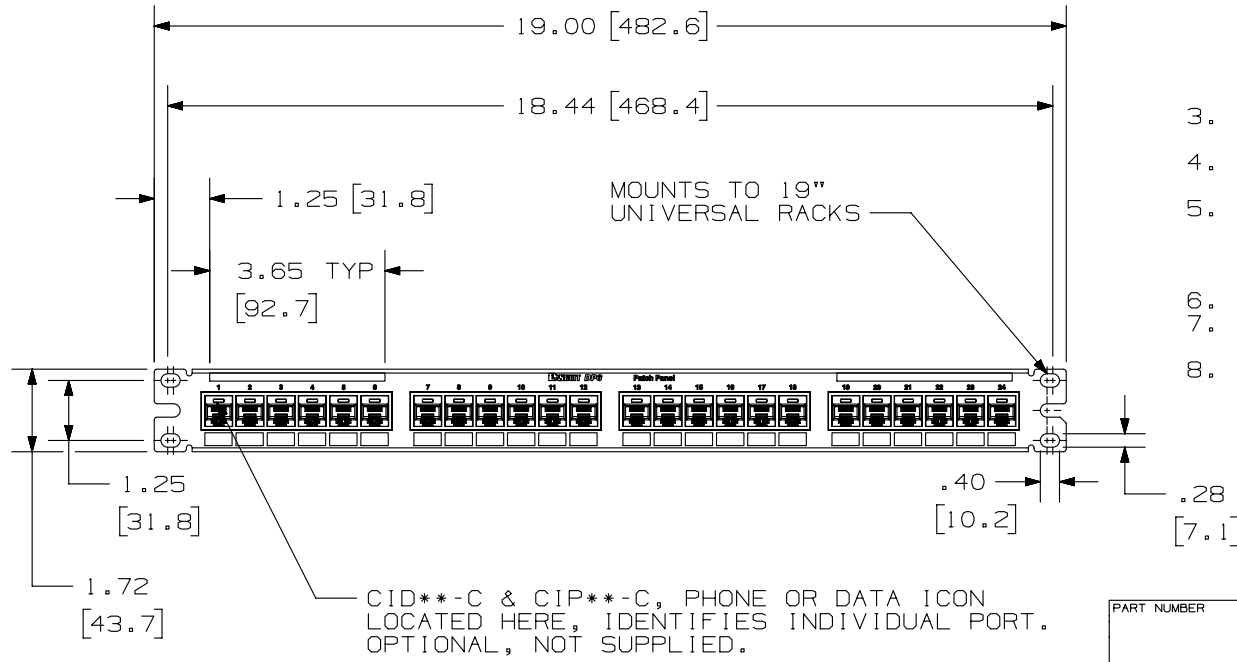

PART NUMBER		DP24688TGY	
TITLE		DP6 PLUS 24 PORT PATCH PANEL	
		CUSTOMER DRAWING	
ITEM REVISION NAME		M02479JF/00	
DATASET FILE NAME		M02479JF_DC242/00C	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
.x ± .xx ± .03 [.8] .xxx ± .010 [.3] ANGLES ±			
DRAWING NUMBER:		02479-242	
DRAWN BY	DATE	CHK	SCALE
LZ	3-4-06	CEF	NONE
SHT 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	6/18/14	JSP	REFR	MMR	A. REVISED DRAWING TITLE BLOCK.	02479-242
R	3-6-06	LZ	CEF	CEF	RELEASED TO PRODUCTION	02479-242

D10100DA/14