



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

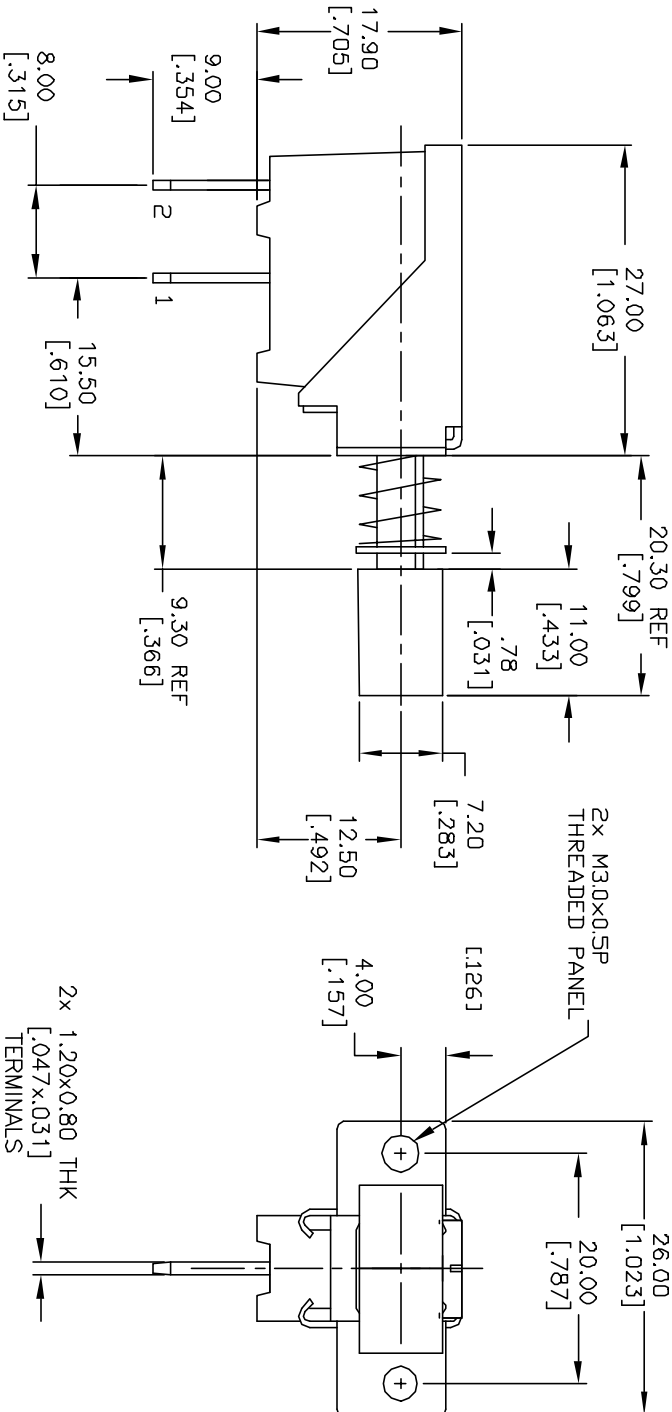

2x 1.20x0.80 THK
[0.047x0.031]
TERMINALS

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERMINAL NOS FOR REF ONLY.
 4. RATING: AC 250V 5A/80A, TV-5
 5. CONTACT RESISTANCE: 100m Ohms MAX. (AT DC 5V@1A)
 6. DIELECTRIC STRENGTH: AC 1000V FOR 1 MIN.
 7. OPERATING FORCE: 350±100gf
 8. TRAVEL: FULL STROKE: 3.5±0.5/-0mm
LOCK STROKE: 2.5±0.5mm

E-SWITCH®

| | | | |
|--|---------|---------------------|----------|
| TITLE | | P197 EE PB /TAB-GRY | |
| REV. | ECN No. | DATE | CHKD |
| A | 11780 | 10/23/01 | CJC |
| RELEASED FOR PRODUCTION | | DATE | CHKD |
| DESCRIPTION | | DATE | CHKD |
| P197 EE PB | | 10/23/01 | CJC |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED | | SCALE | DATE |
| | | 1.5:1 | 10/23/01 |
| | | DR | DWG |
| | | CJC | XP02229A |
| | | REV | A |